




Essential Network Connectivity

RIO

Perle Modular Serial Connectivity

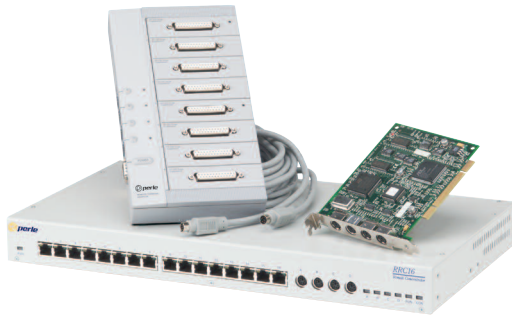

RIO is a modular serial solution for applications that require long distance, fault tolerant cabling. With RIO the normal serial cable length constrictions are lifted by Perle's flexible solution.

Hot Swap Modularity

RIO consists of a host card that provides serial ports by connecting 8 or 16 port Remote Terminal Adapters (RTA's). These adapters can be added or removed to a live system and self configure to ensure ease of set-up and management.

Where Distance Counts

The RTA's are connected using high-speed links capable of distances up to 75m. In addition the serial ports can be distributed even further by daisy chaining the RTA's.


High Density Serial Solution

Features and Benefits:

- Provides up to 128 ports per card
- Universal 3.3/5v PCI and ISA solutions
- PCI-X compatible
- Hot swappable adapters
- Can be spread across large premises
- Fault tolerant cabling
- Support for dual host systems
- Lifetime warranty for security and peace of mind

Applications:

- Data Acquisition
- Retail EPOS
- Terminal/Printer support
- Highway Toll booths operations
- Airport baggage carousel management
- Remote Access Solutions
- Console Management

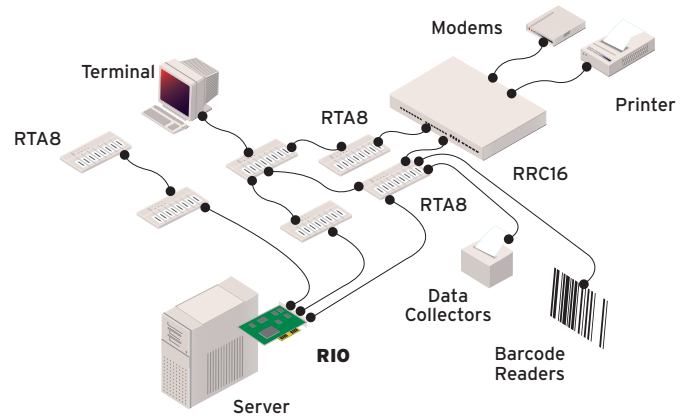

Fault Tolerant Connectivity

When a solution demands minimum downtime, the RIO can be cabled in such a way that in the event of a link failure the remaining RTA's will find the next shortest communication path back to the host card. With some operating systems it is also possible to connect RIO to dual hosts so that in the event of a server failure control of the RTA's switches over to the backup server.

Class Leading Support and Warranty

The Perle RIO is backed by the best service and support in the industry including Perle's unique lifetime warranty.



ISO 9001:2000
FM 70987

PRODUCTS FROM PERLE

Topology

RIO supports an open topology, allowing multiple port modules to be physically connected to a single host card in any configuration you choose, i.e. daisy-chain (linear), ring, cascade and star systems, or any combination of these. With 1 channel connected to the RIO host adapter, 3 more port modules can be connected to the first port module and so on, to create your optimum system.

Technical Specifications

Host Cards

- ISA
- Universal 3.3/5v PCI

RIO Remote Concentrator

RRC16/RJX

- Processor: Plus 4 Quad UARTs
- Power Source: Internal PSU
- Power Consumption: 10W
- Fitting: Floor/Stack/48 cm Rack
- Dimensions: 9.06" x 16.93" x 1.77" (L x W x H)

RRC16/RJX-DX

- As RRC16/RJX
- Includes DB25 Cable Set

RTA8

- RS422 variants available
- Processor: Plus 2 Quad UARTs
- Power Source: External PSU
- Power Consumption: 10W
- Fitting: Floor/Wall
- Dimensions: 9.65" x 5" x 1.34" (L x W x H)

Expandability

- Maximum 128 ports per host card using any RRC16 and RTA8 variant in any combination.
- Maximum 4 host cards per system, giving 512 ports.

Performance

- Four 10 Mbps data Channels
- Line speeds up to 115.2 Kbps

Operating System

- SCO UnixWare
- SCO OpenServer Rel 5
- AIX
- UNIX SVR4
- Solaris
- LynxOS
- Interactive UNIX
- Caldera Open UNIX
- Windows®2000
- Windows®NT 4.0
- Windows®XP
- Windows® Server 2003
- Linux

Visit the Perle Web site for an up-to-date card and driver support availability.

Dual Host Failsafe

For high availability UNIX systems, RIO will support the connection of a dual host card/server. The port module sub-system can be managed entirely by one server/host card, or shared between the two. In the event that one server or host card crashes, the peer system can take control of all port modules. This requires third party Watchdog software.

Approvals

- FCC A, CSA/NRTLc, IEC950, EN60950, CE, CTick

Environmental

- Operating Temperature: 32° to 122°F
- Storage Temperature: -22° to 158°F
- Operating Humidity: 5 to 95% RH (non-condensing)
- Storage Humidity: 5 to 95% RH (non-condensing)

Packaging

- Driver software and materials on CD-ROM
- Quick Start guide

Warranty

- Limited lifetime warranty



www.perle.com